



# SPECIFICATION SHEET

## 120-4000



### MADMAX™ BY MAXIMUM SAFETY®

- Synthetic leather palm enhances grip in dry and light oil applications while providing dexterity
- PVC diamond grip on palm and fingertips provides an enhanced grip and extra cut/abrasion resistance
- Foam laminated spandex fabric back for comfort and breathability
- Thermo Plastic Rubber (TPR) molded finger, thumb and back hand guards for maximum protection
- Reinforced thumb crotch for extended glove life, enhanced comfort and increased abrasion resistance
- Airprene wrist is made with breathable neoprene for comfort
- Vented lycra fabric to keep your hands cool
- Synthetic leather upper and heavy lycra fabric bottom fourchettes enhance the natural contour of the glove for a better fit
- Foam padded knuckle protection
- Retail Ready

### APPLICATIONS

- Petrochemical
- Construction
- Auto repair
- Demolition
- Manufacturing
- Mining
- Fabrication
- Landscaping

### CARE INSTRUCTIONS

Machine wash in cold water. Do not bleach. Hang dry; tumble dry is not recommended. Do not iron.

### TECHNICAL DATA

MATERIAL	Spandex / Nylon / Polyurethane / Synthetic Leather					
CONSTRUCTION	<b>Back:</b> Lime green hi-vis spandex fabric (96% nylon, 4% spandex) <b>Palm:</b> Synthetic leather (60% nylon, 40% polyurethane), 0.8mm gauge <b>Fingers:</b> Synthetic leather (60% nylon, 40% polyurethane), 0.8mm gauge <b>Knuckles:</b> 5mm foam padded <b>Cuff:</b> 3mm nylon airprene					
COLOR	Shell: <span style="color: yellow;">■</span> Yellow / Coating: <span style="color: black;">■</span> Black					
CUFF STYLE	Open Cuff					
SIZES	S - XXXL					
PACKAGING	12 pairs per dozen, 6 dozen per case					
CASE	26.5" x 17.2" x 12" / 67.3cm x 43.8cm x 30.5cm					
CASE WEIGHT	S	M	L	XL	XXL	XXXL
	33.7 lbs 15.3 kg	34.4 lbs 15.6 kg	35.7 lbs 16.2 kg	36.8 lbs 16.7 kg	39 lbs 17.7 kg	39.2 lbs 17.8 kg
COO	Pakistan					

### PERFORMANCE PROPERTIES

EN388: 3121						
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

ASTM D3884 Abrasion - Tabor Method = 1,600 cycles +/- 100  
 ASTM-D2632 RESILIOMETER TESTING:

	YELLOW TPR MOLDINGS ON BACK OF HAND	KNUCKLE AREA	YELLOW/BLACK/ WHITE AREA, TPR MOLDINGS CENTER OF FINGERS
AVERAGE READING	25	25	41.8




### BARCODES

ITEM	PAIR	DOZEN	CASE
<span style="color: yellow;">■</span> 120-4000/S	616314069574	01616314069573	02616314069572
<span style="color: yellow;">■</span> 120-4000/M	616314069567	01616314069566	02616314069565
<span style="color: yellow;">■</span> 120-4000/L	616314069550	01616314069559	02616314069558
<span style="color: yellow;">■</span> 120-4000/XL	616314069581	01616314069580	02616314069589
<span style="color: yellow;">■</span> 120-4000/XXL	616314069598	01616314069597	02616314069596
<span style="color: yellow;">■</span> 120-4000/XXXL	616314110177	01616314110176	02616314110175

### DIMENSIONS (in/cm)

	S	M	L	XL	XXL	XXXL
<b>A</b>	9.35 / 23.7	9.75 / 24.7	10.5 / 25.8	10.55 / 26.8	10.75 / 27.3	11 / 27.9
<b>B</b>	4.05 / 10.3	4.3 / 10.9	4.55 / 11.6	4.8 / 12.2	5.08 / 12.9	5.3 / 13.5

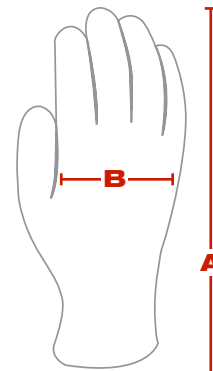

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.