

GUARDIAN™ ROOF WARNING LINE PERIMETER

ARE YOU OSHA COMPLIANT?


In accordance with OSHA 1926.502(f), and other applicable regulations to warn of leading edge hazards, this device shall be used only by a qualified competent person. The warning line shall be staged and supported in such a way that it is no less than 34 inches from the walking/working surface at its lowest point and no more than 39 inches at its highest point.





GUARDIAN™ ROOF WARNING LINE PERIMETER

Use the Cortina Safety Products Roof Warning Line Perimeter on roof tops, construction sites, in parking lots, manufacturing plants, and office buildings. This simple to assemble Roof Warning Line Perimeter, with it's easy pennant flag tie off system, is easy to set up and remove quickly, and stores easily!

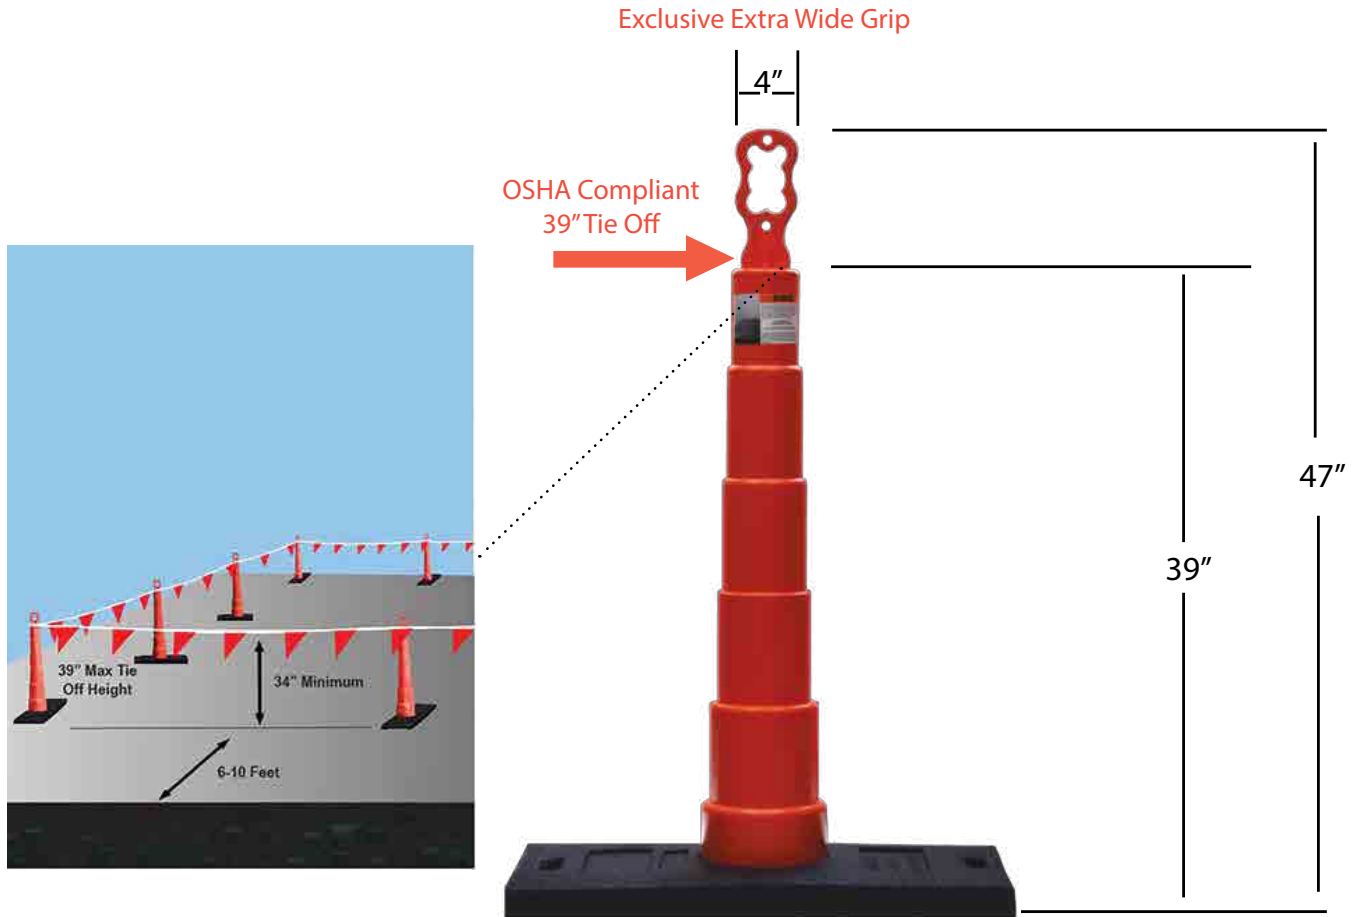

GUARDIAN ROOF WARNING LINE PERIMETER

- OSHA 1926.502(f) Compliant
- Cortina EZ Grab Guardian high visibility orange
- Molded High Density Polyethylene with UV Color Stabilization
- OSHA Compliant Pennants - 500 lb tensile strength
- Guardian accepts warning light or sign
- Does not conduct
- Meets fall protection system requirements
- Easy BASE drop over assembly
- Stackable for storage
- 100% recycled rectangular 30 lb rubber base

ITEM #	DESCRIPTION
03-765RBC	Kit - 50 EZ Grab Guardian Channelizers w 50 Bases and 3 Red/Yellow Pennant Strands
03-765	EZ Grab Guardian Channelizer
03-752-30	30 lb Rubber Base
OSHA Compliant 105' Pennants	
03-400-105	Red
03-405-105	Yellow
03-407-105	Red/Yellow Alternating