


SIZING TOOL BELTS

Bashlin belts are sized using the measurement between the 2 D-Rings on the main portion of the belt (A).



2 D-Ring and 4 D-Ring belts are sized identically.

Measure for summer clothing. If the belt is the correct size, there will be ample adjustment for the relatively limited time it will be used in the colder weather.

If a belt is sized correctly, the hip D-Rings will point straight ahead, and the tongue adjustment will be in the center hole (B).



CORRECTLY SIZED TOOL BELT

USE BASHLIN'S LINEMAN'S SIZING BELT (LSB) (E)

Estimate the correct size of your belt and adjust the LSB to the size you believe your belt should be.



Place the LSB on your hips at the location where your tool belt is worn (F).


By trial and error, change the length of the LSB until the belt is the correct length, and note the adjusted size of the belt (G).



USING THE LINEMEN'S SIZING BELT

TO FIND YOUR D-RING SIZE USING A TAPE MEASURE

1. Locate the point where the heel of the hip D-Ring should rest (C).
2. Begin to measure from this point. Measure with a seamstress tape around the buttocks to the same point on the opposite side (D).

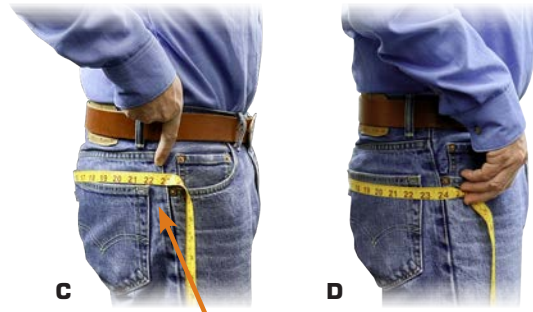

USING A TAPE MEASURE

BELT ADJUSTMENT IN INCHES - PER ASTM F887

D Size - In.	Minimum	Center Hole	Maximum	Tool Loops
D18	32	36	40	3
D19	33	37	41	3
D20	34	38	42	3
D21	36	40	44	4
D22	37	41	45	4
D23	38	42	46	4
D24	40	44	48	4
D25	41	45	49	4
D26	42	46	50	4
D27	44	48	52	4
D28	45	49	53	4

USE YOUR PHONE TO SCAN THE QR CODE FOR SIZING INFO!

