

PTC P100 NIOSH Filters

P100 - PRESSTOCHECK™ F-4004

TWIN FILTERS FOR THE FORCE TYPHOON™8 HALF FACE MASK

**TECHNICAL
SPECIFICATION**

RESPIRATORY PROTECTION

INSTRUCTIONS FOR USE

- Follow the instruction supplied to fit the filters to the mask in the correct way
- Align the arrows on the mask and filter. Twist the filter clockwise into the facemask inlet using the easy bayonet fitting
- Care must be taken to ensure that the correct filter type is selected for the work to be carried out
- If in doubt as to the type of filter required seek professional advice

PERFORMANCE

When attached to a Force Typhoon™8 offers an assigned protection factor (APF) of 10 x the OSHA Permissible Exposure Limit (PEL) against dusts, fibres, fumes and liquid aerosols

DIMENSIONS OF PRODUCT

- Height: 4"
- Length: 1.5"
- Width: 3.5"
- Weight: 3oz (Approx.)

PACKAGING DIMENSIONS

- Inner Packaging** Quantity: 2 Filters Per Bag
- Height: 11" Width: 6" Length: 5" Weight: 6.7oz (Approx)
- Outer Packaging** Quantity: 10 Bags
- Height: 7" Width: 10" Length: 13.5 Weight: 70oz (Approx)

MATERIALS

- Filter Body: ABS
- Filter Inner: Man-made materials


CLEANING & MAINTENANCE

- Wipe with damp cloth soaked in mild detergent solution, being careful not to get any liquid inside the filter
- Do not use abrasive substances or solvents
- Cleaning the filter does not extend its life
- Store unopened packs in an airtight container, out of direct sunlight away from chemicals, abrasive substances and in a dry atmosphere



CONFORMITY

- NIOSH Approved
- NIOSH approval number: TC-84A-7833
- Markings: NIOSH P100

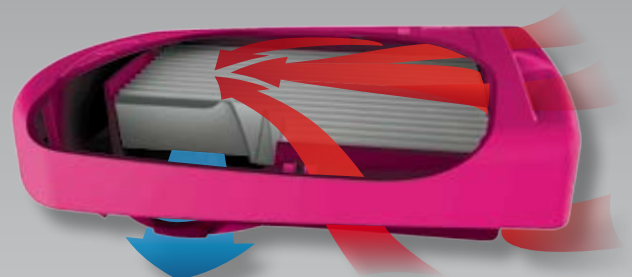

LIMITATIONS OF USE

- Protection will only be offered if the filter is fitted correctly to an appropriate respirator
- The use by date is printed on the outside of the container
- The working life of the filter depends on many factors including work rate, airflow and concentration of any contaminant in the atmosphere
- The filter should be changed immediately if:
 - Breathing difficulties due to clogging are experienced
 - Chemical breakthrough of a contaminant is detected by smell, taste or any other means
 - The filter becomes damaged
- Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres
- Bayonet style filters should never be made to fit masks with any other fitting type

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email sales@jspna.com



MANUFACTURING FOR SAFETY
www.jspna.com

sales@jspna.com
Tel: 833-JSP-SAFE

