


STOP USE & REPLACE - GUARDIAN FALL PROTECTION

ANGEL ANCHOR (#00260)

For all Guardian Fall Protection Angel Anchors, immediately **STOP USE** and **REMOVE PRODUCT FROM SERVICE**.

THERE HAVE BEEN NO ACCIDENTS OR INJURIES RELATED TO THIS NOTICE.

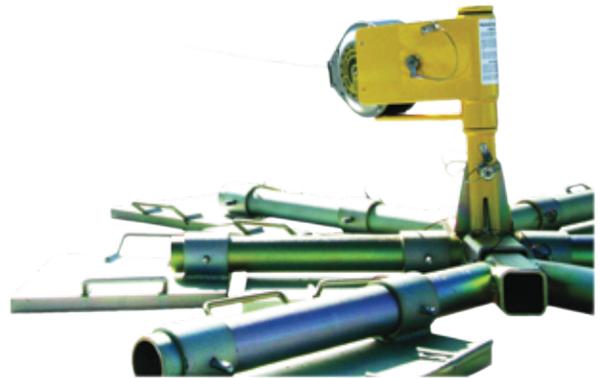

The Angel Anchor may be unsafe for use on certain substrate materials, and was additionally labeled with an incorrect maximum worker weight capacity. Guardian has redesigned the Angel Anchor to resolve these issues, but all existing Angel Anchors must no longer be used.

All affected product will be replaced by Guardian free of charge.

REPLACEMENT INSTRUCTIONS:

Attempt to **identify the following information**, which may be requested by Guardian's Customer Service Department:

- Purchase Order #
- Product Serial #
- Date of Purchase
- Distributor
- Any other information to assist in the identification of the specific product

To coordinate Angel Anchor return and replacement, contact Guardian's Customer Service Department:

CS@guardianfall.com or **1-800-466-6385**

Customer Service will work to coordinate the shipment of replacement product, **which will be billed to Guardian's shipping account**, and can assist with any other questions.



GUARDIAN FALL PROTECTION

Ph: 1.800.466.6385 Fx: 1.800.670.7892
6305 S. 231st St., Kent, WA 98032

ADDITIONAL INFORMATION:

Replacement Angel Anchors are manufactured with rubber friction padding to allow for use on a wide variety of substrates, and are properly labeled with a 220 lb. maximum worker weight capacity.

Replacement Angel Anchors are suitable for use on the following substrates:

- EPDM membrane • Torch Down (Smooth) • Torch Down (Granulated) • Cement • Wood • TPO • Vinyl • PVC

Example Angel Anchor weighted pad with rubber friction padding:



Angel Anchor updated labeling:



Guardian
FALL PROTECTION

Angel Anchor
Part # 00260

www.guardianfall.com
1-800-466-6385

Prior to use, read and understand all manufacturer's instructions provided with equipment at time of shipment.

Compliant with all EN 795-2012 regulations.
Capacity range: 130-220 lbs. Materials: galvanized steel.
All connections must be selected and deemed compatible with the Angel Anchor by a Competent Person.

Date of Manufacture:

90175 (Rev. F)
Made in China

WARNING Avoid contact with all hazards, including electrical shock, corrosive chemicals, and sharp/abrasive edges and surfaces.
IMMEDIATELY remove from service if exposed to forces of Fall Arrest.
ONLY use on compatible substrate. See instructions.

INSPECTION GRID

User must inspect prior to EACH use. Competent Person must complete formal inspection every 6 months. Competent Person to inspect and initial.

Date of First Use: _____

Product lifetime is indefinite as long as equipment passes pre-use and Competent Person inspections.

If equipment fails inspection IMMEDIATELY REMOVE FROM SERVICE.

YR	J	F	M	A	M	J	J	A	S	O	N	D
20__												
20__												
20__												
20__												
20__												

DO NOT REMOVE LABELS



GUARDIAN FALL PROTECTION
Ph: 1.800.466.6385 Fx: 1.800.670.7892
6305 S. 231st St., Kent, WA 98032